


POSIFLEX



Possible · Incredible · Flexible

About Us

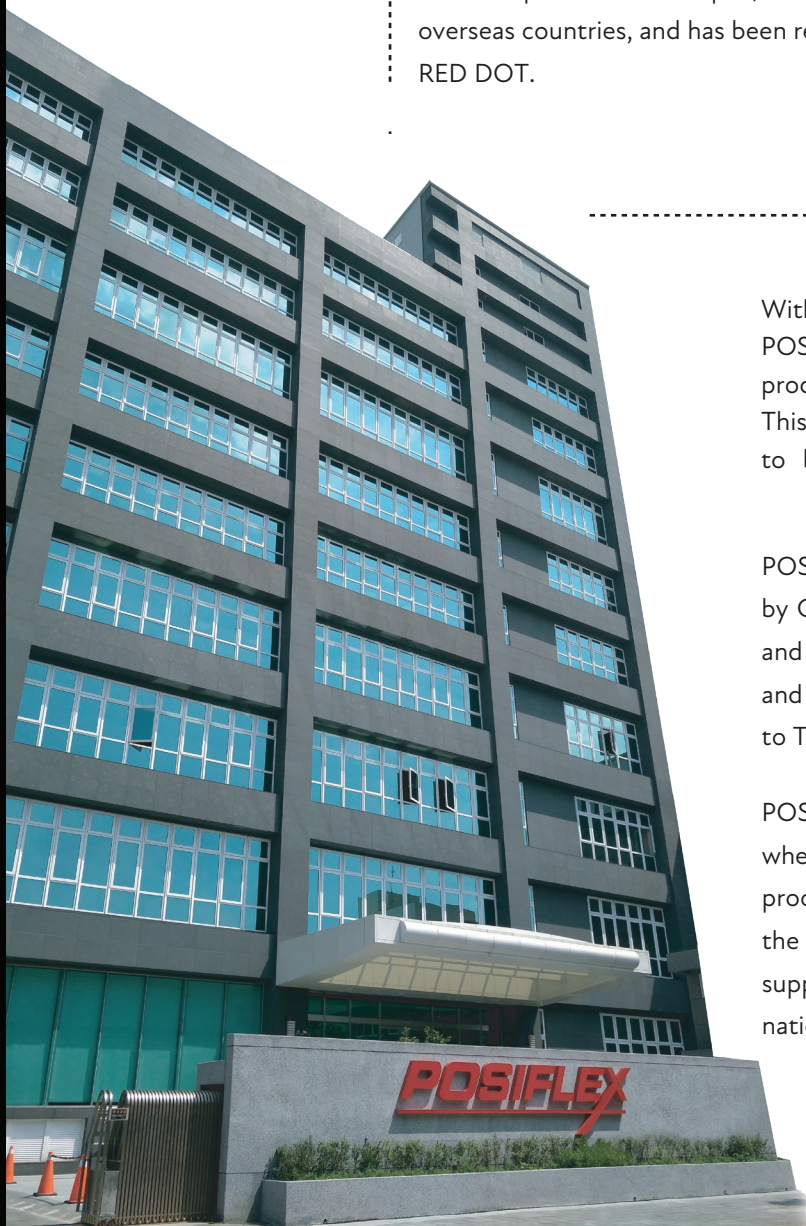

Established in 1984, POSIFLEX is a global leader in designing and manufacturing of POS and peripheral OEM/ODM products. POSIFLEX began its transformation in 1991 to commit to the professional design and production of Point of Sale (POS) management systems and peripheral products and started marketing OBM products worldwide under the brand name POSIFLEX in 1996. Now, POSIFLEX is marketed worldwide as one of the leading brands in the industry and has 9 established subsidiaries (India, UK, Netherlands, Germany, China, South Korea, Japan, Malaysia, Singapore) and sold in more than 75+ countries to provide local and prompt services.

The Posiflex headquarters in Taiwan serves as an operation, management, and production centre certified by the ISO 9001/14001 compliance standards. All stages of production, from R&D and design to manufacturing, are done internally. POSIFLEX controls the core technologies and has now developed over 20 POS system and peripheral application products and registered over 30 patents from Japan, Germany, United Kingdom, United States, Australia, and other overseas countries, and has been recognized by multiple world-class design awards, such as the RED DOT.

With the well-established India Operation since 1997, POSIFLEX has been recognized for its un-compromised product quality and assured after sales services to its customers. This has helped POSIFLEX to grow its market share over 50% and to become the leading POS company in India.

POSIFLEX Technology India has the highest acceptance by Global, National & Regional brands across all formats of Retail and Hospitality, having a base close to 100K POS terminals and peripherals being installed till date, covering Metropolitan to Tier 3 cities.

POSIFLEX strength lies in the ‘Customer First’ approach, where the customer requirements drive the product development process. Headquartered in Bengaluru. We maintain this trust with the help of our strong and dedicated 10 branch offices, 550+ support locations, 500+ channel partners and located across the nation.

POSIFLEX 4R Quality Policy

Revolutionary Technology

Reliable Quality

Reasonable Price

Recognized Service

PS Series

- 15.6" True-flat PCAP with multi-touch support (IP65 on front panel)
- Resolution - 1366 x 768 (Optional 1024x768)
- Audio - 2W Speaker for Online Order alert
- Attachment Options - Secondary Screen (Touch / Non Touch), Pole Display, MSR, 2D Scanner

PS-621X

- Intel 11th Gen TGL Core i3/ i5 /i7 Processor
- 8GB DDR4L(Max 64GB), 128GB M.2 SSD

PS-3616 G2

- Intel QC/J6412
- 4GB DDR4(Max 16 GB), 128GB M.2 SSD



Windows



android



Linux



XT Series

- 15/17" True-flat PCAP with multi-touch support (IP65 on front panel)
- Resolution - 1024 x 768
- Audio - 2W Speaker for Online Order alert
- Options - Secondary Screen, Pole Display, MSR, 2D Scanner

XT-8315

- Intel 11th Gen, Core i5/i7
- 4GB DDR4 (Max 64GB), 128GB M.2 SSD

XT-8317

- Intel 11th Gen Core i3/i5 /i7
- 4GB DDR4 (Max 64GB), 128GB HDD



Windows



Linux

RT Series

- 15"/15.6" True-flat PCAP with multi-touch support (IP65 on front panel)
- Ports - 3 Serial, 5 USB, 1 LAN
- Options - Wi-Fi, Bluetooth, Camera
- Attachment Options - MSR, 2D Scanner, Secondary Screen (Touch / Non-Touch), Pole Display

RT-3016-A

- Android 13, MTK Genio G700
- 15.6" TFT LCD with LED backlight, 1920 x 1080
- 8 GB, LPDDR4 onboard

RT-6015-G2

- Intel 11th Gen, Core i3
- 4GB DDR4 (Max 64GB), 128GB M.2 SSD
- Resolution: (RT6015) 1024 x 768 / (RT6016) FHD 1920 x 1080



Windows



android



Linux



GT Series

- 15.6" oTP LCD (Typ. 400 nits) (IP65 on front panel)
- Ports - 1 Serial, 6 USB, 2 LAN
- Resolution - 1920 x 1080
- Attachment Options - MSR, 2D Scanner, Secondary Screen (Touch / Non-Touch), Pole Display

GT-7016-G2

- Intel TGL UP3 Core i3/i5/i7-Ultra Thin Slim Screen with latest oTP Touch
- 8GB DDR4 (Max 64GB), 128GB M.2 SSD



Windows



Linux



BT Series

- Field adjustable cashier screen landscape to portrait.

- BT-8016**
- 15.6" oTP LCD
 - Intel Raptor Lake U Core i3/i5/i7
 - DDR5 SO-DIMM, max. 64GB, 128GB SSD
 - Resolution -1920 x 1080, FHD
 - Landscape / Portrait Kiosk mode
 - Optional Inbuilt Printer & Epson TM-M30 Compatible Bracket

HC Series

- 21.5" True-flat PCAP touch with High-end infotainment terminal (IP65 on front panel)

- HC-1621P/Pro**
- Intel 7th Gen Core i3/i5 Fanfree Rugged Touch Terminal
 - 8GB , Max. 32GB 128GB M.2 SSD
 - Supports Win10/11 IoT, TPM & RAID Feature with Dual LAN

- HC-2021A**
- Rockchip RK3399, Dual-core Cortex A72 up to 1.8GHz + Quad-core Cortex A53 up to 1.4GHz
 - DDR4 4 GB, Storage 32 GB
 - Android 9.0*/Android 10.0 with GMS

- KDS-4321**
- Intel Raptor Lake U Core i3/i5/i7
 - DDR5 SO-DIMM x 2, max. 64 GB
 - Windows 10 IoT LTSC / Windows 11 IoT LTSC



HC Series

KDS



MT Series

- 10.1" True-flat PCAP with multi-touch support (IP65 on front panel)
- Connectivity -Wi-Fi + BT, Optional 3G/4G
- In-built Camera, Micro-SD, Nano Sim, Power Jack, Micro-USB
- Options - MSR, RFID, Fingerprint Sensor, Pistol Grip, Shoulder Strap, CS-100

- MT-6208A**
- 8" Android 13 W/GMS MediaTek MT8786
 - 4GB LPDDR4, 64GB eMMC (optional 8GB 128GB eMMC)
 - Resolution - 1280 x 800

- MT-6210A**
- 10" Android 13 W/GMS MediaTek MT8786
 - 4GB LPDDR4, 64GB eMMC (optional 8GB 128GB eMMC)
 - Resolution - 1280 x 800


- MT-6210W**
- 10" Windows 11 IoT, Intel Elkhart Lake N6210
 - 8GB LPDDR4, 64GB eMMC
 - Resolution - 1280 x 800, 2D Barcode scanner



PP-8802/8803/7100

- Print / Paper Width - 64 mm (512 dots/line) / 72 mm (576 dots/line) / 80 or 58 +0/-1 mm
- Resolution - 8 dots/mm, up to 576 dots/line (default 512 dots/line)
- Print Speed - Up to 220 mm/sec
- Cutter - Auto cutter + manual cutter
- LED Indicator - Power; Error; Paper out
- Interface: PP-8802:USB (True USB/Virtual COM selectable) + Serial
PP-8803: USB (True USB/Virtual COM selectable) + Serial+LAN
PP7100: USE (3 in 1 - USB, Serial & LAN)





TX-2300-G2

- Celeron J6412, up to 2.60 GHz, 1.5M Cache M.2 128GB
- DDR4 SO-DIMM x 2, max. 32GB
- DB9 x 2 + RJ45 x 2, 5V/12V support on all COM ports
- USB 3.0 x 2 + USB 2.0 x 4

TX5000 + / TX7000

- Intel 11th Gen/Intel 13th Gen Core- i3/i5/i7
- Default 8G (max 64GB, 128GB M.2 SSD)
- M.2 expansion slot
- Supports Win10/11 IoT, 9 USB Port (4 x USB 3.0+ 5 x USB 2.0), 4 Serial, Dual LAN

POSIFLEX JK Series

- 27"/32" True-flat PCAP multi-touch
- Android 10 with GMS / Windows core i3 or i5
- DDR4 SO-DIMM slot x 1, max. 32 GB, 256GB SSD
- Resolution: 1920 x 1080, Dual Side (optional)

POSIFLEX HK Series

- 15.6" TFT PCAP multi-touch
- Android 10 with GMS / Windows core i3 or i5
- DDR4 SO-DIMM slot x 1, max. 32GB
- Resolution: 1920 x 1080, passport & ID card reader

POSIFLEX EK Series

- 21" True-flat PCAP multi-touch
- Android 10 with GMS / Windows core i3 or i5
- DDR4 SO-DIMM slot x 1, max. 32 GB 256GB SSD
- Resolution: 1920 x 1080, table top or floor mount stand



Dual side Floor mount
JK Series



Hotel Check-in Kiosk
HK Series



Self-Ordering
KT2



Floor Mount
EK Series



RFID Self-checkout
KT6

RUGTEK KT Series

- KT2**
- 15.6" / 21.5" Tempered glass PCAP touch screen
 - Android 14 W/GSM support / Windows Core i5
 - Default Table-Top, Optional (wall mount or floor stand)

- KT6**
- 24" True-flat PCAP multi-touch
 - Android / Windows core i3 or i5
 - DDR4 SO-DIMM slot x 1, max. 32 GB, 256GB SSD
 - Resolution: 1920 x 1080, wall mount or floor mount stand



- Optional Printer, 2D Scanner, Payment Holder and Camera

Standalone Touch Monitor



Kitchen Display System



Programmable Keyboard




Receipt Printer



Cash Drawer



Pole Display/ MSR





RP-82A Compact 3" Thermal Printer

- Printing Width - 72mm & 48mm ;
Paper width: 80mm
- Resolution - 203dpi
- Print Speed - 200mm/sec
- Print Commands - ESC/POS
- Interface - USB + LAN



RP-80V1

3" Thermal Printer

- Print /Paper Width - 72mm /80 mm
- Resolution - 203dpi (8dot/mm)
- Print Speed - 350mm/sec
- Print Density - 576 dots/line or 384 dots/line
- Print Commands - ESC/POS/OPOS
- Interface - USB/Serial/Ethernet



RP 80 HI

3" Thermal Wi-Fi Printer

- Print /Paper Width - 72mm /80 mm
- Resolution - 203dpi (8dot/mm)
- Print Speed - 250mm/sec
- Print Commands - ESC/POS/OPOS
- Interface - USB/Wi-Fi /Ethernet



BP-03 R/L

3" Thermal Printer

- Print /Paper Width - 72mm or 48 mm
- Resolution - 203dpi (8dot/mm)
- Print Speed - 200mm/sec
- Print Commands - ESC, POS
- Interface - USB, Ethernet
- Battery - 2000 mAh / 2500 mAh



LS-3002

2D Wired Barcode Scanner

- OS - Windows/iOS/Android
- Light source - Aiming: 625 nm LED;
illumination: 4000K LED
- Image Sensor - CMOS
- Image(Pixels)- 640 (H)x480 (v)pixels
- Frame Rate - 30fps/s
- Interfaces - USB keyboard, USB virtual
serial port, RS-232



CR-205/330/410

Metal Cash Drawer

- Bill/Coin Tray - Metal bill clips Adjustable
divider or up to 5 compartments (with 5
metal clips), 8 coins fixed compartments
- I/O Interface - 12V, 24V for RJ11/RJ12
Receipt Printer Interface
- Lock - Three position key lock for
High Secure
- Micro Switch/Sensor - Compatible Driver
Control JPOS/OPOS
- CR 410 - 410x415x100mm (WxDxH)
- CR 330 - 330x380x90mm (WxDxH)
without bush
- CR 205 - 206x300x90mm (WxDxH)

RP-82A Cube

3" Thermal Printer

- Printing Width - 72mm & 48mm ;
Paper width: 80mm
- Resolution - 203dpi
- Print Speed - 250mm/sec
- Print Commands - ESC / POS
- Interface - USB, Ethernet, Bluetooth



RP-326 USE

3" Thermal Printer

- Print /Paper Width - 72mm or 48 mm /79.5±
0.5mm
- Resolution - 203dpi (8dot/mm)
- Print Speed - 250mm/sec
- Print Density - 576 dots/line or 384 dots/line
- Print Commands - ESC/POS/OPOS
- Interface - USB/Serial/Ethernet



RP-76V

4" E-Commerce Receipt Printer

- Print /Paper Width - 104mm /112mm
- Resolution - 203dpi
- Print Speed - 5"/sec
- Media Type- Continuous, Gap, Fan Fold
- Print Commands - ESC/POS/OPOS/TSPL/CPCL/ZPL
- Interface - CR & USB (Optional Lan/RS232/WiFi/Bluetooth)



BP-03IV

4" Thermal Portable Receipt/Label Printer

- Print /Paper Width - 104mm /42-110mm
- Resolution - 203dpi
- Print Speed - 50mm/sec
- Print Density - Continues Paper, Label,
Linerless Paper
- Print Commands - ESC/POS/TSPL/CPCL/ZPL
- Interface - Micro USB, Bluetooth (Optional WiFi)
- Battery - 2400mAh



TX 6100

Configurable POS Box

- Core i3-10110U/i5-10210U
- DDR4 SODIMM 2666 MHz - 64GB
- 1 x M.2 slot, support M.2 2280 NVME
PCIEx4/SATA adaptive standard
SSD 1x 2.5 inch HDD expansion



CD-3200 BT Series

- Light Level - Aiming 617 nm
- Illumination - 4500K LED
- Print Contrast - ≥ 25%
- Drop Durability - 3 meters
- IP - IP54 (Dust Protected, Splashing Water)
- Light Level - On 100,000 Lux (Daylight)
- Battery - 2200mAh; Continuous 24hrs scanning in full charge
- Communication Interface/Distance - 2.4G, BLE4.0
Max 100mtrs in open space
- Bluetooth - 40 Metres



CD-3200 BT-S • Pixels - 1280 x 800, 1 million pixels

CD-3200 BT-R/E • Pixels - 640 x 480

- CD-3200 BT-RC** • 1 Cradle connects upto 50 BT Scanners
- Offline Inventory Mode, transfers data via upload
button in the cradle, stores upto 10,000 scan data
- Scanner charging through cradle or USB cable



RLS-1000B/RLS-1000P/RLS-1000H

Thermal Label Printing Scales

- Fashionable appearance
- Support bulk import PLU by USB
- Waterproof, moisture proof, insect-resistant
- Dual-motor printing module design, more durable
- Capacity - 6/15kg 15/30kg
- Verification Scale Interval - 2/5g 5/10g
- Minimum Capacity - 40g 100g
- Data Storage - Store 10000PLU, can set at most 112 hotkeys
- Printing Speed - 90mm/sec
- Interface - RS232+Ethernet+WiFi



Wi-Fi



RTP4

Smart Desktop Android POS Terminal

- Android 13
- ARM Cortex-A55, Quad-Core 2.0GHz
- Main Display: 15.6"HD 1366×768, 15.6"FHD 1920×1080 (optional)
- Secondary Display: 10.1"1024×600
- 4GB RAM+64GB ROM
- 8GB RAM+128GB ROM (optional)
- 6 x USB, 1 x DB9 + 1 x RJ11
- Interface 1 x RJ45, Ethernet TCP/IP 1000M

i2

Mobile POS

- Android 13.0
- 5.5"HD, Resolution 720×1440
- 4GB RAM+64GB ROM
- Bluetooth - BT5.1
- IP68 Protection and Multiple Drop
- Optional: Hand strap, Base charger



i1H

Powerful Mobile POS

- Android 14
- Cortex-A53 Octa-core 2.3GHz
- 3GB RAM+32GB ROM
- 5.5"HD+, IPS 720×1440
- Built-in 58mm Thermal Printer
- Print Speed: 80mm/s
- 1 x Type C, USB 2.0, Support OTG With Rubber Plug




Posiflex Technology Inc. (Global HQ)

No.23, Datong St. Tucheng Dist. New Taipei City 23697, Taiwan

Posiflex Technology (India) Pvt. Ltd.,

7/3, 3rd Floor, Jeet Dynasty, Swamy Vivekananda Rd,
Nagavarapalya, Bengaluru - 560093
Tel : +91 80 40782700 | Mob : +91 953 543 2110
marketing@posiflexindia.com

Partner Stamp



For Service Enquires
1800-103-1245

The Product information and specifications are indicative subject to change without prior notice.

